



Single-use, quick-fit  
condensate cleaner for  
compressed air systems  
up to 60cfm (1.7m<sup>3</sup>/min)\*

Only SEPURA gives you this performance  
from such a small package.

Our proprietary SILEXA<sup>TM</sup> filter medium gives SEP 60 ST the capacity to out-perform separators twice its size. And it's pure simplicity to install and replace. Just fix the permanent back plate to a wall or compressor cabinet, insert two push-in quick fittings and it starts to protect you - and the environment.

Oily water in; clean water out. Discharge straight to the sewer with levels as low as 5ppm.

**At the end of its service life**, simply remove the push fittings, attach the clip-on lid and plug (provided with the replacement unit) and slide it off the wall plate. Captured oil is sealed inside the separator, which is now ready for transport and disposal.



**SILEXA**

Throughout thorough trials this patented media has been shown to be lighter, 20% more absorbent per weight and cleaner compared to other OEM products.

For more information on SILEXA<sup>TM</sup> please visit our website.

Compact size  
Single use  
Quick fit


**SEP 60 ST**

low capacity, single use condensate cleaners

## Component parts

- 1 De-pressurising void and bulk oil removal shred
- 2 SILEXA™ final filter medium
- 3 Outlet port
- 4 Anti-syphon vent
- 5 Slot to fit wall bracket (supplied with unit)
- 6 Handy lid to cover inlet when disposing of used unit comes as part of kit
- 7 Inlet

**Please Note:** the unit comes shipped with a **6mm inlet as standard**. The sizes below can also be supplied. Please state preference when ordering.

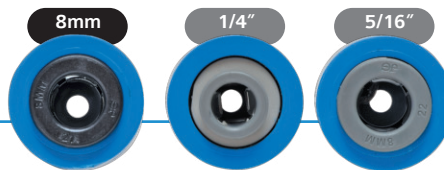

## Features and benefits...

- Compressor capacity up to 60cfm (1.7 m<sup>3</sup>/min) based on 80% duty.
- Service life - 4000 operating hours at 60cfm or 8000 hours at 30cfm (replace after a maximum of 2 years )\*\*\*
- Service period matched to normal compressor routine
- Dimensions only 145mm x 145mm x 220mm
- Wall or cabinet mounting (permanent 'quick-fit' plate provided)
- Push-in 'quick' connectors for speed and ease
- Quickest and cleanest possible servicing routine
- Clip-on cap and blanking plug seal the cleaner for transit.
- ABS plastic and filter material are re-cyclable.
- Lightweight and compact for international bulk shipping


\* SEP60ST is rated for use on compressor systems using mineral or mineral-based lubricants. Contact SEPURA regarding PAG lubricants, but in any case de-rate by at least 50%.

\*\* It is the user's responsibility to verify discharge allowances in their region

\*\*\* Assumes compressor oil carry-over is no more than 5mg/m<sup>3</sup>

The compact SEP 60 ST and its SILEXA™ contents are shown here at actual size

your SEPURA supplier:

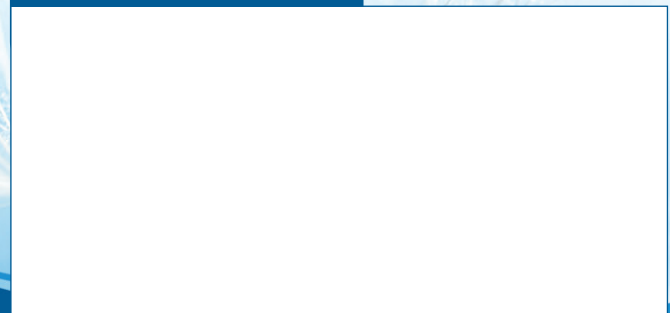


t: +44 (0)1543 379212

e: sales@sepura-technologies.com

www.sepura-technologies.com